



版本	变更原因	日期	姓名

Diagram

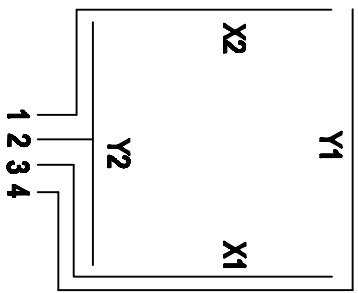

Pin #	Assignment
1	X2
2	Y2
3	X1
4	Y1

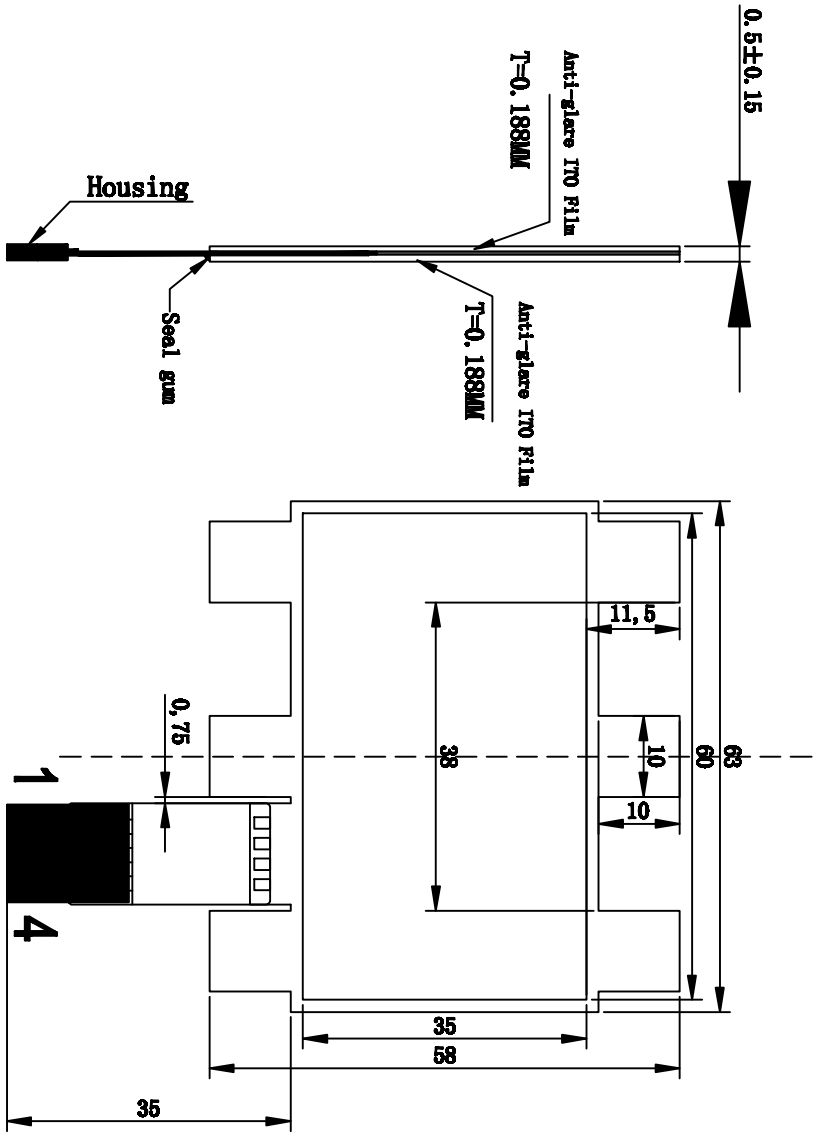

- Notes:
1. Type: Film to Film
 2. Operating Voltage: $\leq 10V$
 3. Operation Temperature: $-10^{\circ}C \sim 60^{\circ}C$
Storage Temperature: $-20^{\circ}C \sim 70^{\circ}C$
 4. Life Time: 1,000,000 times
 5. Connect Material: FPC
 6. Response Time: $\leq 10ms$
 7. Linearity: $\leq 1.5\%$
 8. Transmittance: $\geq 75\%$
 9. Surface Hardness: $\geq 3H$ (pencil)
 10. Operation force: 60g \sim 150g
 11. Resistance: X: 450 Ω ~1100 Ω Y: 162 Ω ~396 Ω

GreenTouch

Shenzhen GreenTouch Technology Co., Ltd

Model No.:	GT-41V-27E-1
Structure	F+F
Design	李锐
Check	何伟
Release	张强

Model No.:	GT-41V-27E-1	Size	2.7"	Ratio	4:3
Structure	F+F	Unit	mm	Scale	1:1
Design	李锐	Date	2016.12.9	Page	1/1
Check	何伟	Date	2016.12.9	Version	A0
Release	张强	Date	2016.12.9		