
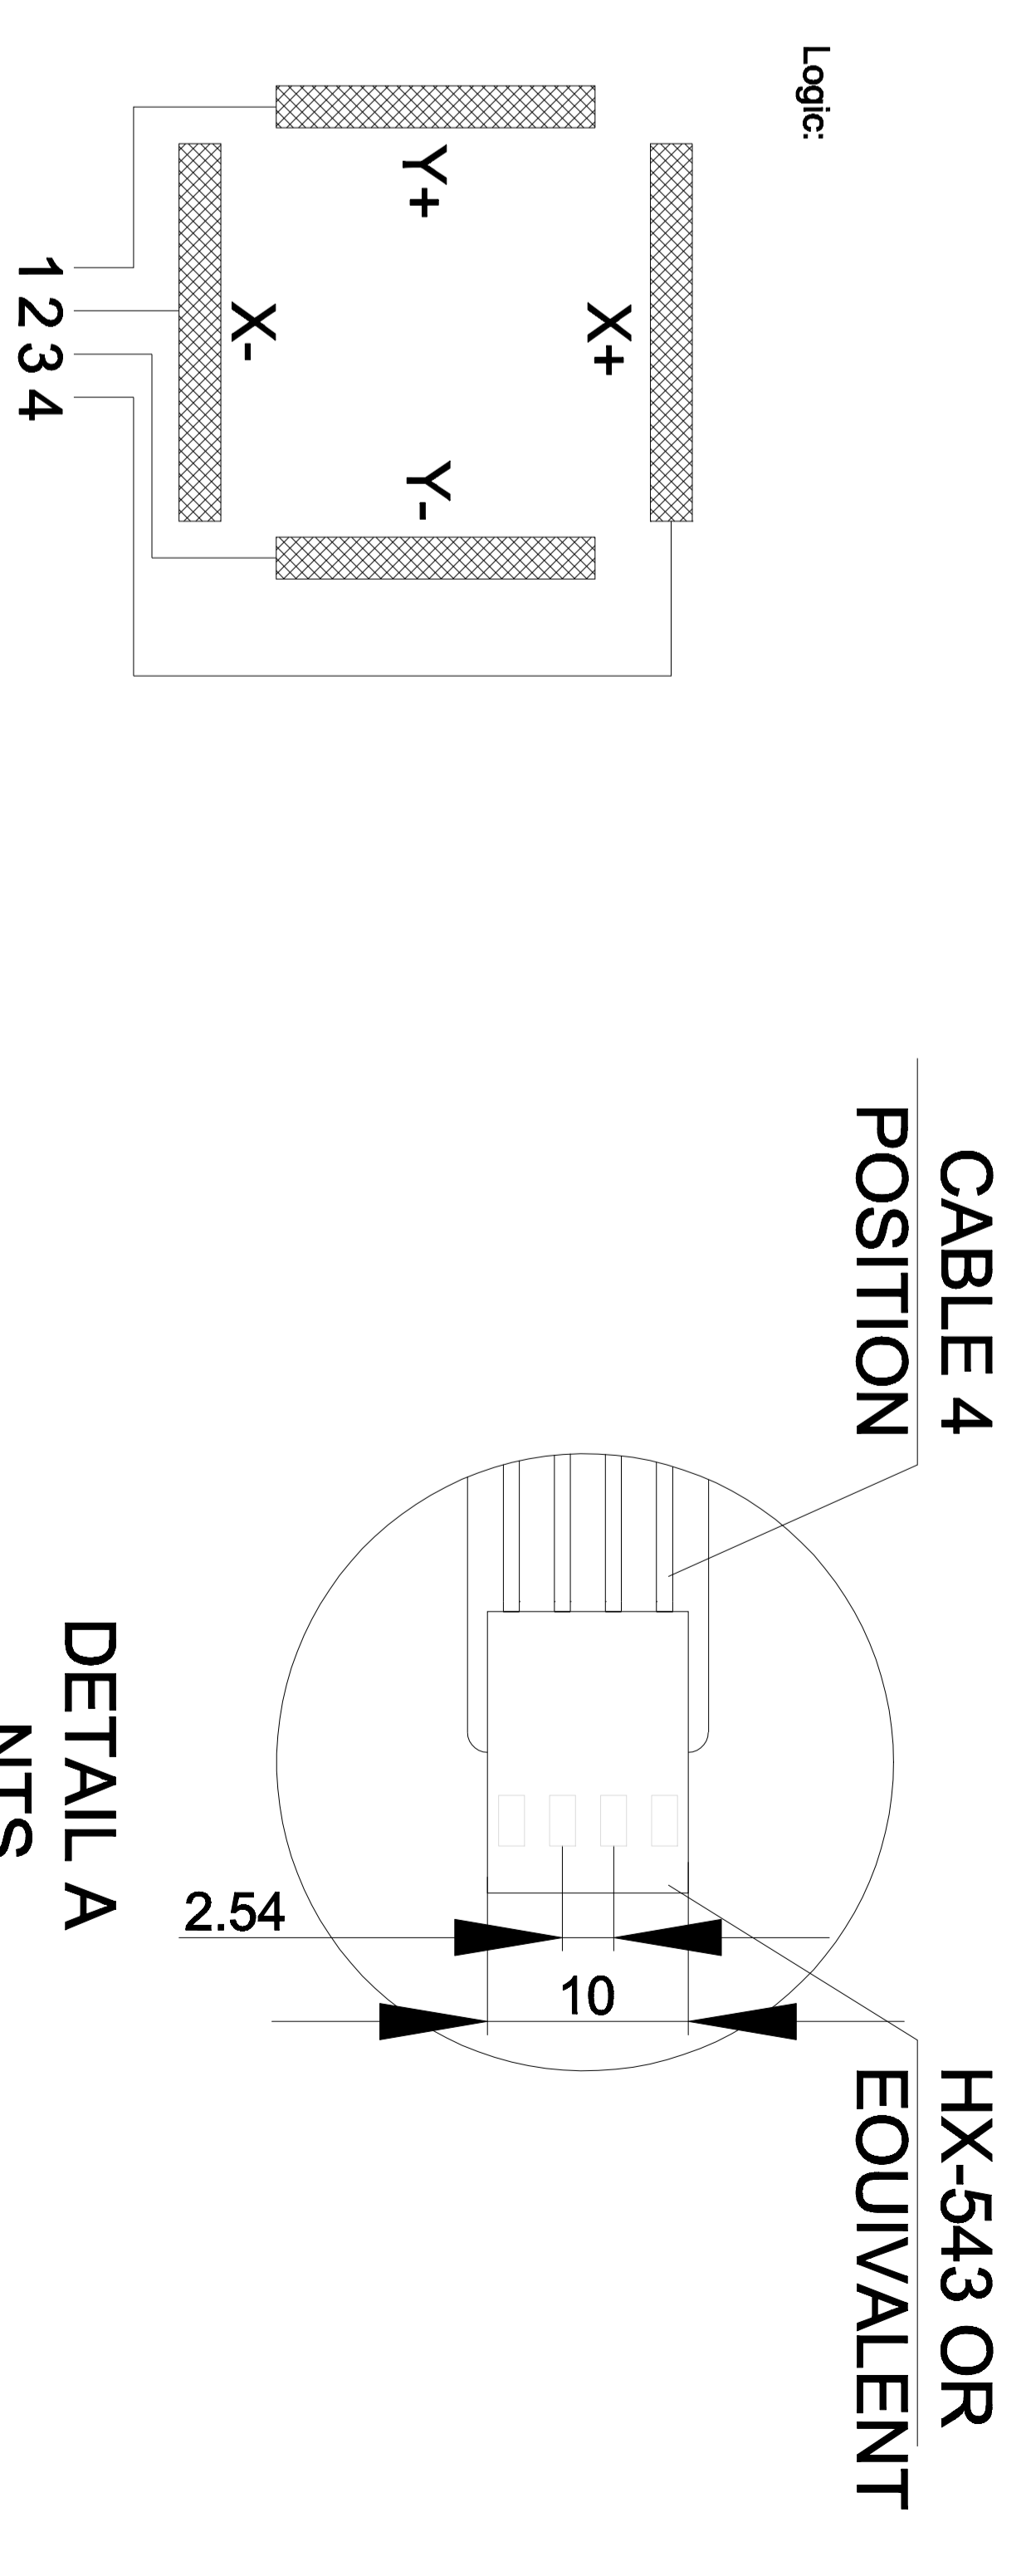


|    |      |    |    |
|----|------|----|----|
| 版本 | 变更原因 | 日期 | 姓名 |
|    |      |    |    |

**Notes:**

1. Type: Film to Glass
2. Operating Voltage:  $\leq 10V$
3. Operation Temperature:  $-10^{\circ}C \sim 60^{\circ}C$   
Storage Temperature:  $-20^{\circ}C \sim 70^{\circ}C$
4. Life Time: 1,000,000 times
5. Connect Material: FPC
6. Response Time:  $\leq 10ms$
7. Linearity:  $\leq 1.5\%$
8. Transmittance:  $\geq 75\%$
9. Surface Hardness:  $\geq 3H$  (pencil)
10. Operation force:  $60g \sim 150g$
11. Resistance: X:  $360\Omega - 879\Omega$  Y:  $203\Omega - 496\Omega$

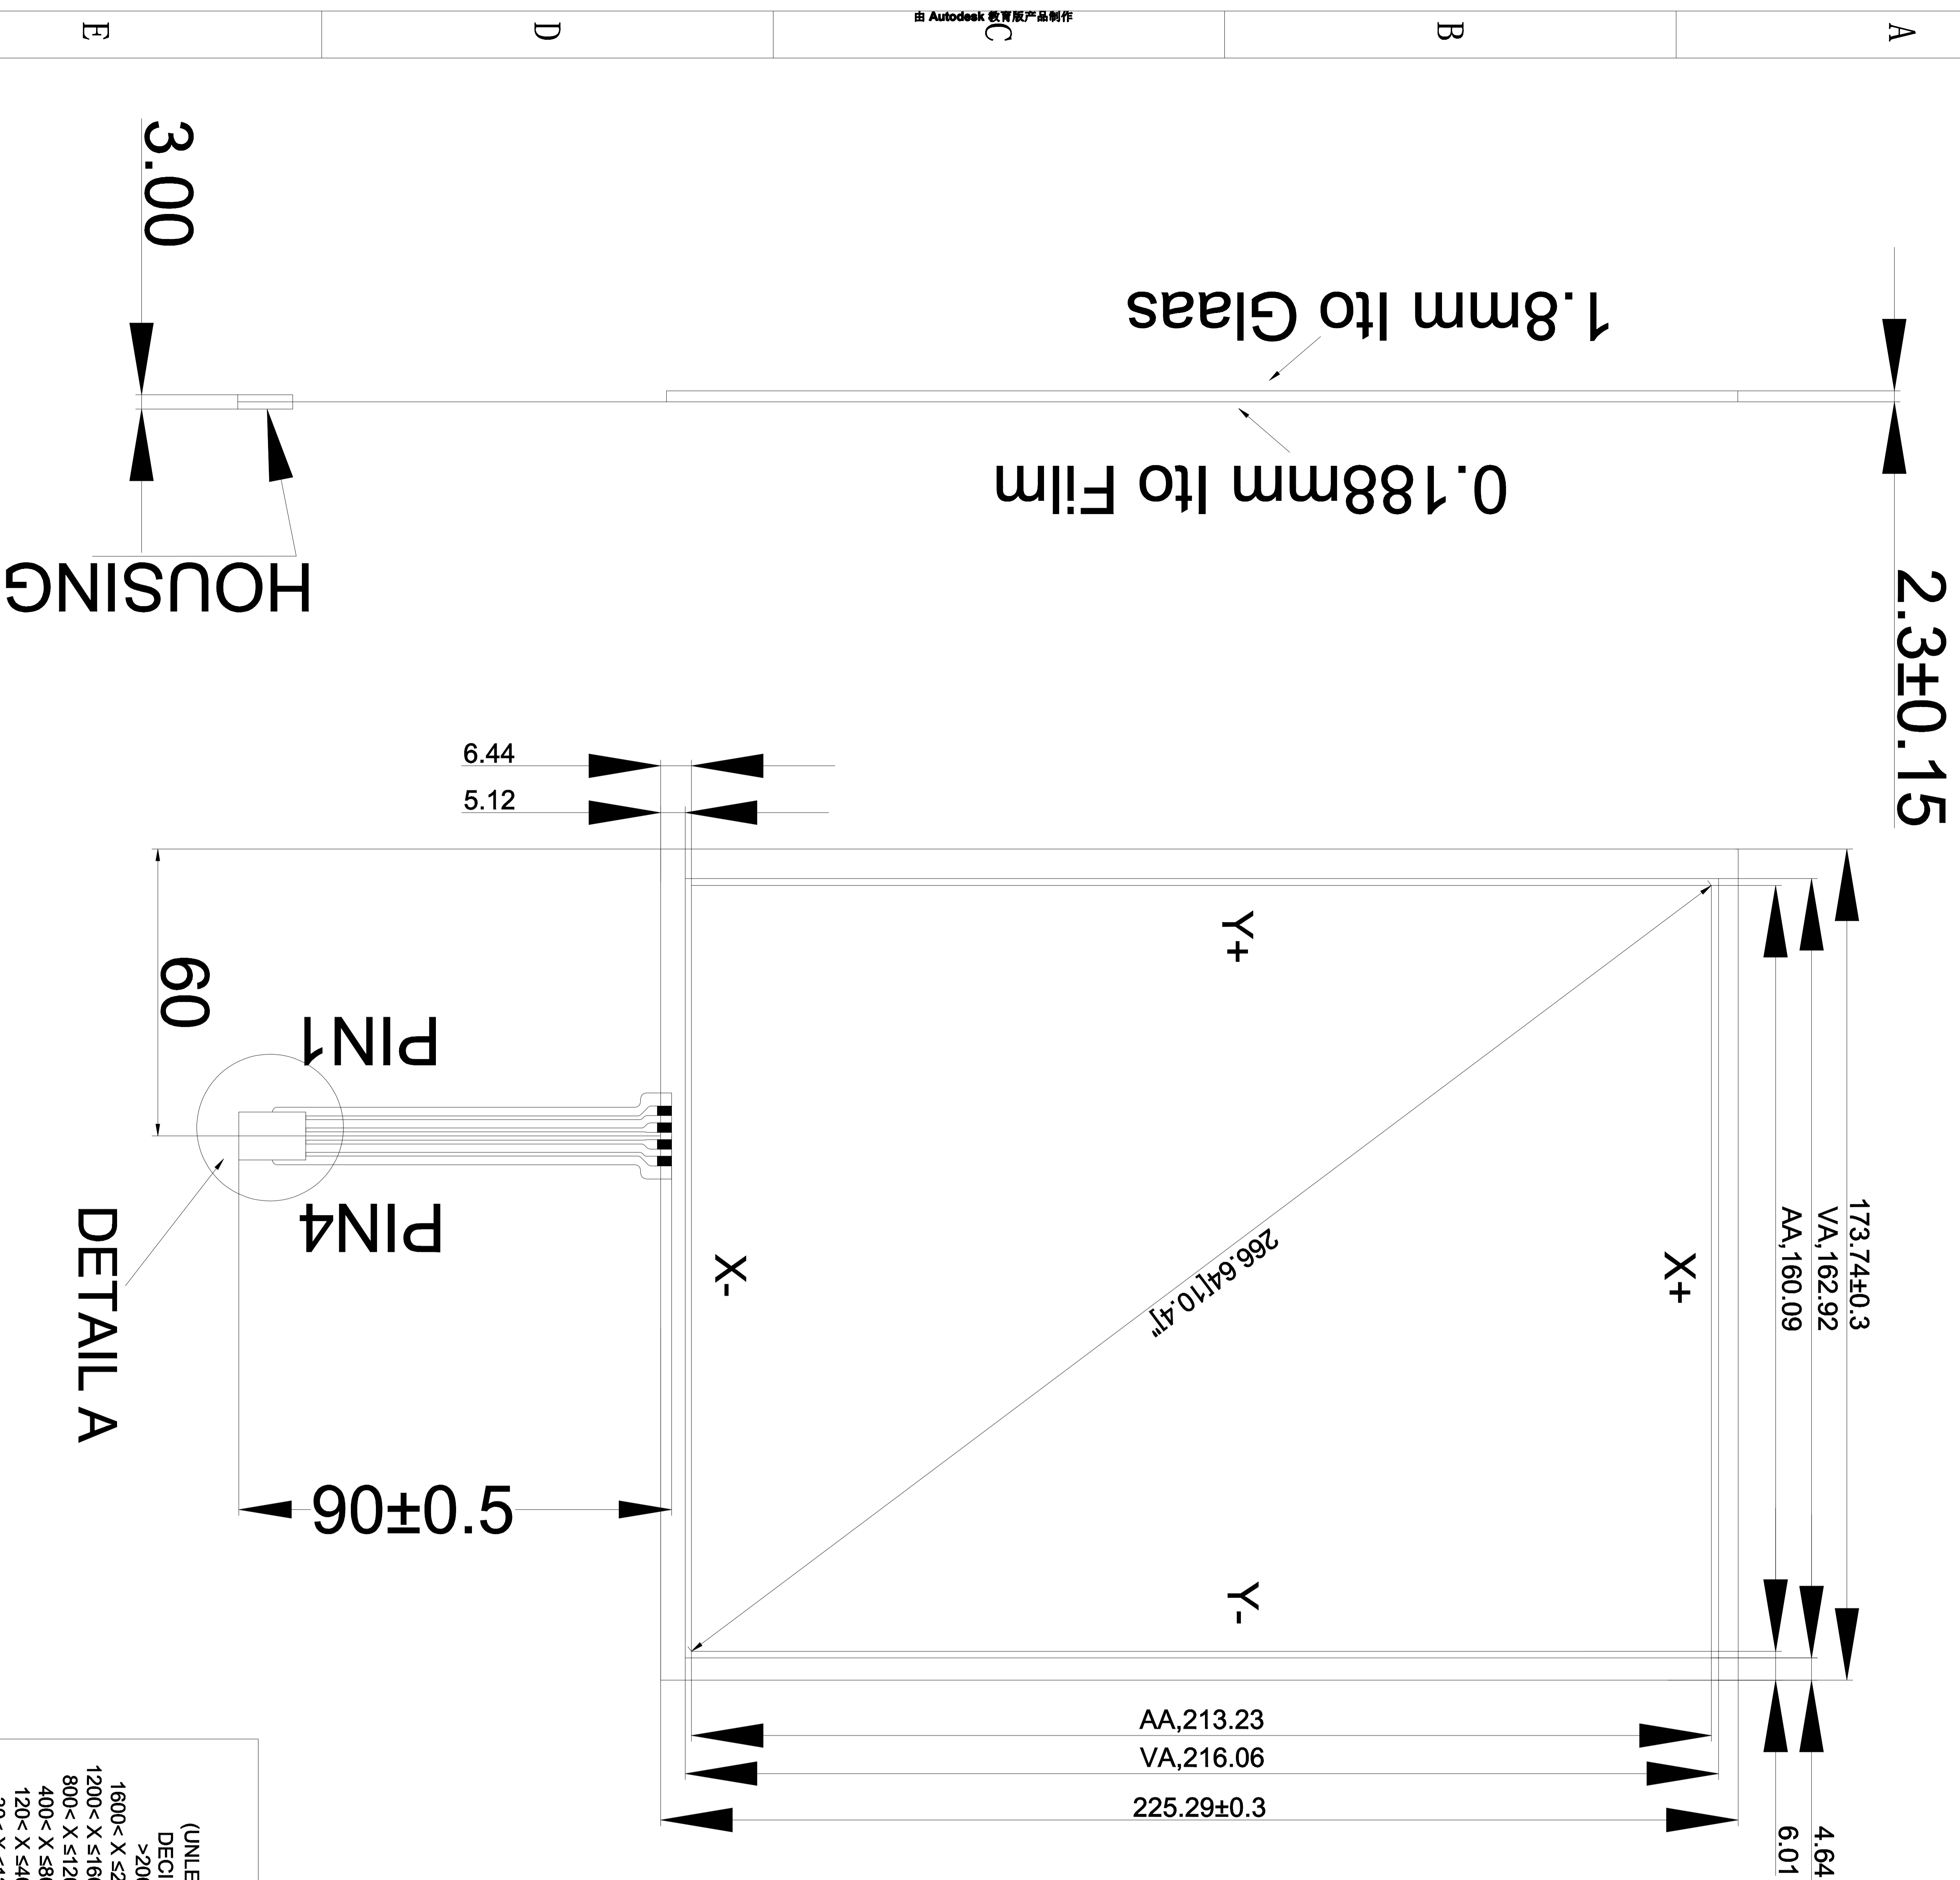

TOLERANCES  
(UNLESS OTHERWISE STATED)  
DECIMALS ANGLES  $\pm 0.5\%$

|                        |              |
|------------------------|--------------|
| $>2000MM$              | $\pm 2.00MM$ |
| $1600 < X \leq 2000MM$ | $\pm 1.20MM$ |
| $1200 < X \leq 1600MM$ | $\pm 0.80MM$ |
| $800 < X \leq 1200MM$  | $\pm 0.50MM$ |
| $400 < X \leq 800MM$   | $\pm 0.40MM$ |
| $120 < X \leq 400MM$   | $\pm 0.30MM$ |
| $30 < X \leq 120MM$    | $\pm 0.20MM$ |
| $< 30MM$               | $\pm 0.10MM$ |



Shenzhen GreenTouch Technology Co., Ltd

|            |              |      |           |         |     |
|------------|--------------|------|-----------|---------|-----|
| Model No.: | GT-4W-104A-2 | Size | 10.4"     | Ratio   | 4:3 |
| Structure  | G+F          | Unit | mm        | Scale   | 1:1 |
| Design     | 李俊           | Date | 2015.8.12 | Page    | 1/1 |
| Check      | 付作丰          | Date | 2015.8.12 | Version | A0  |
| Release    | 汪陈           | Date | 2015.8.12 |         |     |