
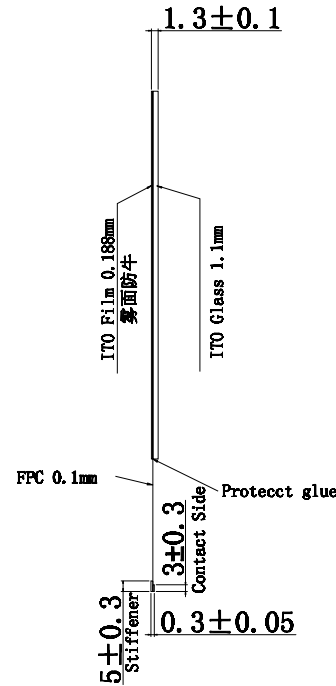


5	4	3	2	1	0	
标示		更改内容			签名	日期
⚠						

正视图


侧视图

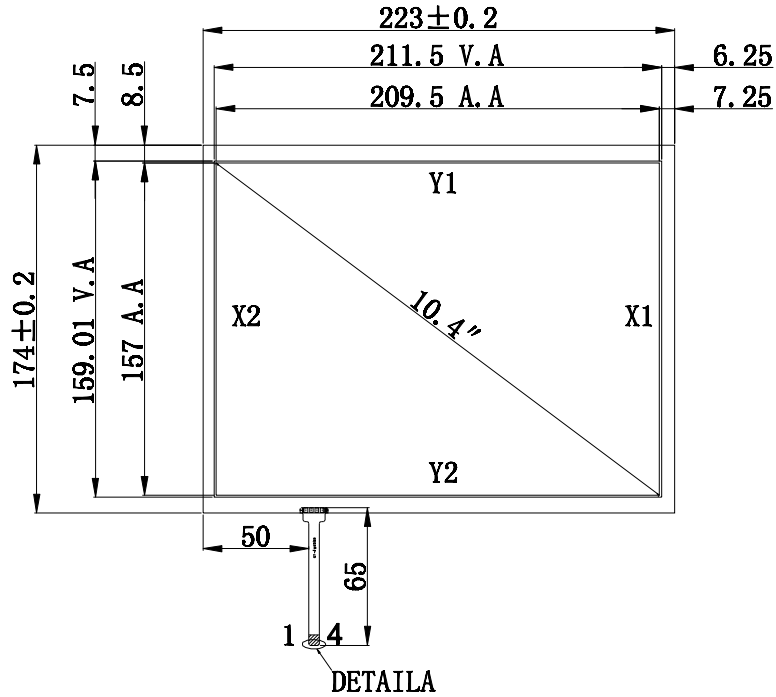

Notes:

- 1.Type:ITO Glass+ITO Film
- 2.Operating Voltage:≤10V
- 3.Operation Temperature: -10℃~50℃
Storage Temperature:-30℃~80℃
- 4.Life Time:>1,000,000 times
- 5.Connect Material:FPC
- 6.Response Time: ≤10ms
- 7.Linearity: ≤1.5%
- 8.Transmittance: ≥75%
- 9.Surface Hardness: ≥3H(pencil)
- 10.Operation force:20g~150g
- 11.Resistance:X:346Ω-846Ω
Y: 211Ω-515Ω

PIN	OUT	Contact Side
1	X2	
2	Y2	
3	X1	
4	Y1	

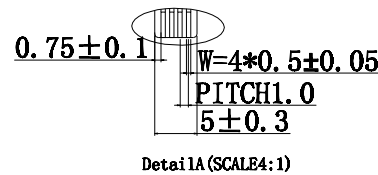

<p>GreenTouch</p> <p>Shenzhen GreenTouch Technology Co.,Ltd</p>			
Model No.:	GT-4W-104B-1	Size	10.4"
Structure	GHF	Unit	mm
Design	李俊	Date	2016.8.16
Check	符作华	Date	2016.8.16
Release	张强	Date	2016.8.16
Ratio	4:3	Scale	1:1
Page	1/1	Version	AG

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作