

5

5

4

4

3




3

2

2

1

1

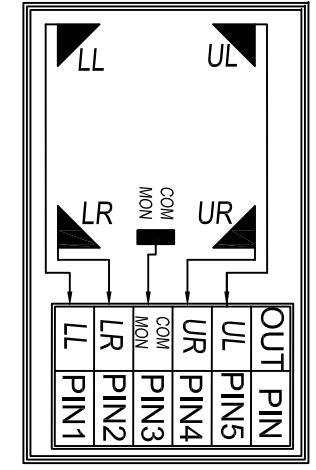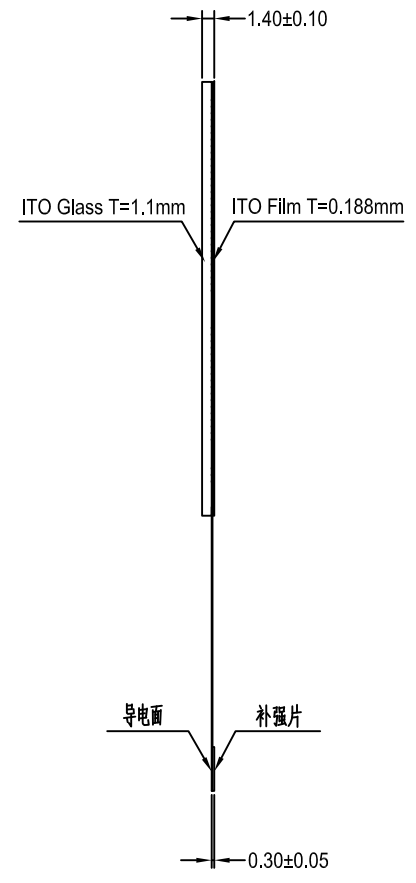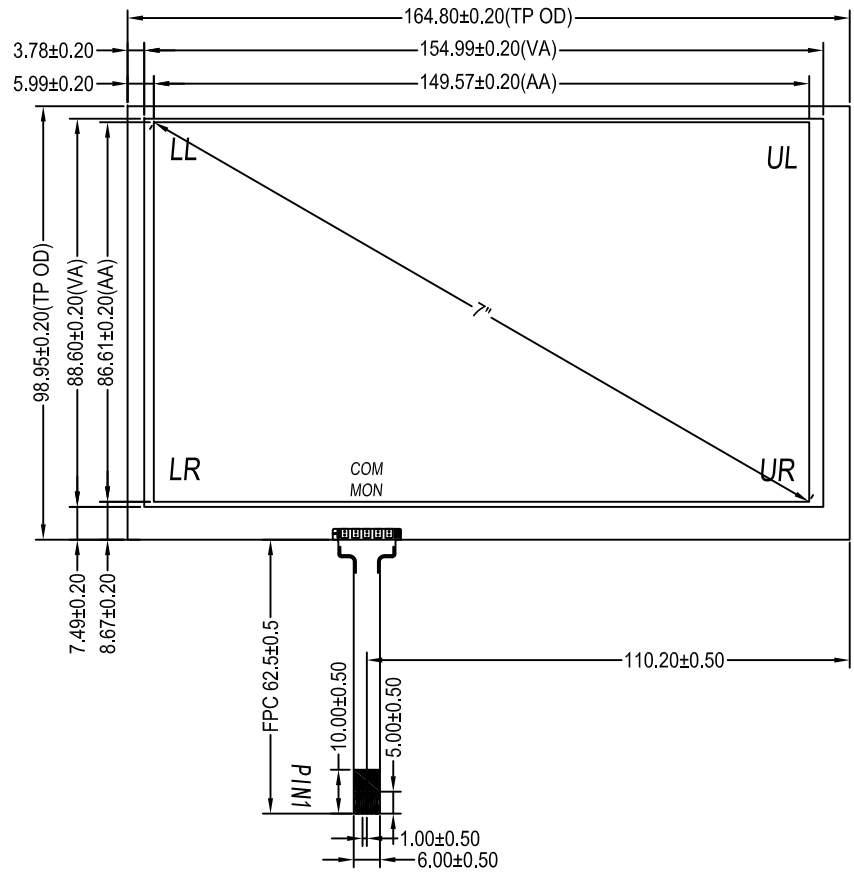

**Instruction:**

- 1.Type:Film to Glass
- 2.Operating Voltage:≤10V
- 3.Response Time:≤10ms
- 4.Storage Temperature: -20℃~+70℃
- 5.Operation Temperature/Humidity : -10℃~+60℃/ 20%~95%
- 6.Hitting Life:>10,000,000 Times ,250gf Force;
- 7.writing Life>1,000,000 Times 250gf Force;
- 8.Connect Material:FPC

- 9.Film Thickness:0.188mm
- 10.Glass Thickness:1.1mm
- 11.Light transmission: ≥75%
- 12.Force:100g or more
- 13.Linearity:≤3%
- 14.Insulation:≥20MΩ
- 15.Resistance:50Ω < PIN1,PIN2 < 250Ω  
50Ω < PIN2,PIN4 < 250Ω  
50Ω < PIN4,PIN5 < 250Ω  
50Ω < PIN5,PIN1 < 250Ω
- 16.Surface Hardness≥3H(pencil)

TOLERANCES  
(UNLESS OTHERWISE STATED)  
DECIMALS ANGLES ±0.5%

>2000MM	±2.00MM
1600< X ≤2000MM	±1.20MM
1200< X ≤1600MM	±0.80MM
800< X ≤1200MM	±0.50MM
400< X ≤800MM	±0.40MM
120< X ≤400MM	±0.30MM
30< X ≤120MM	±0.20MM
<30MM	±0.10MM

		GreenTouch Technology Co.,Ltd				
		Model No.:	GT-5W-7A-1	Size	7"	Ratio
Structure	G+F	Unit	mm	Scale	1:1	
Deslgn	李俊	Date	2016.8.5	Page	1/1	
Check	付作书	Date	2016.8.5	Version	A0	
Release	汪陈	Date	2016.8.5			