

G

F

E

由 Autodesk 教育版产品制作

C

B

A



5

4

3

2

1

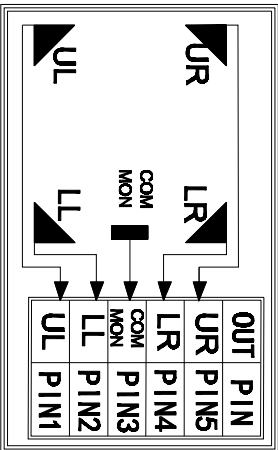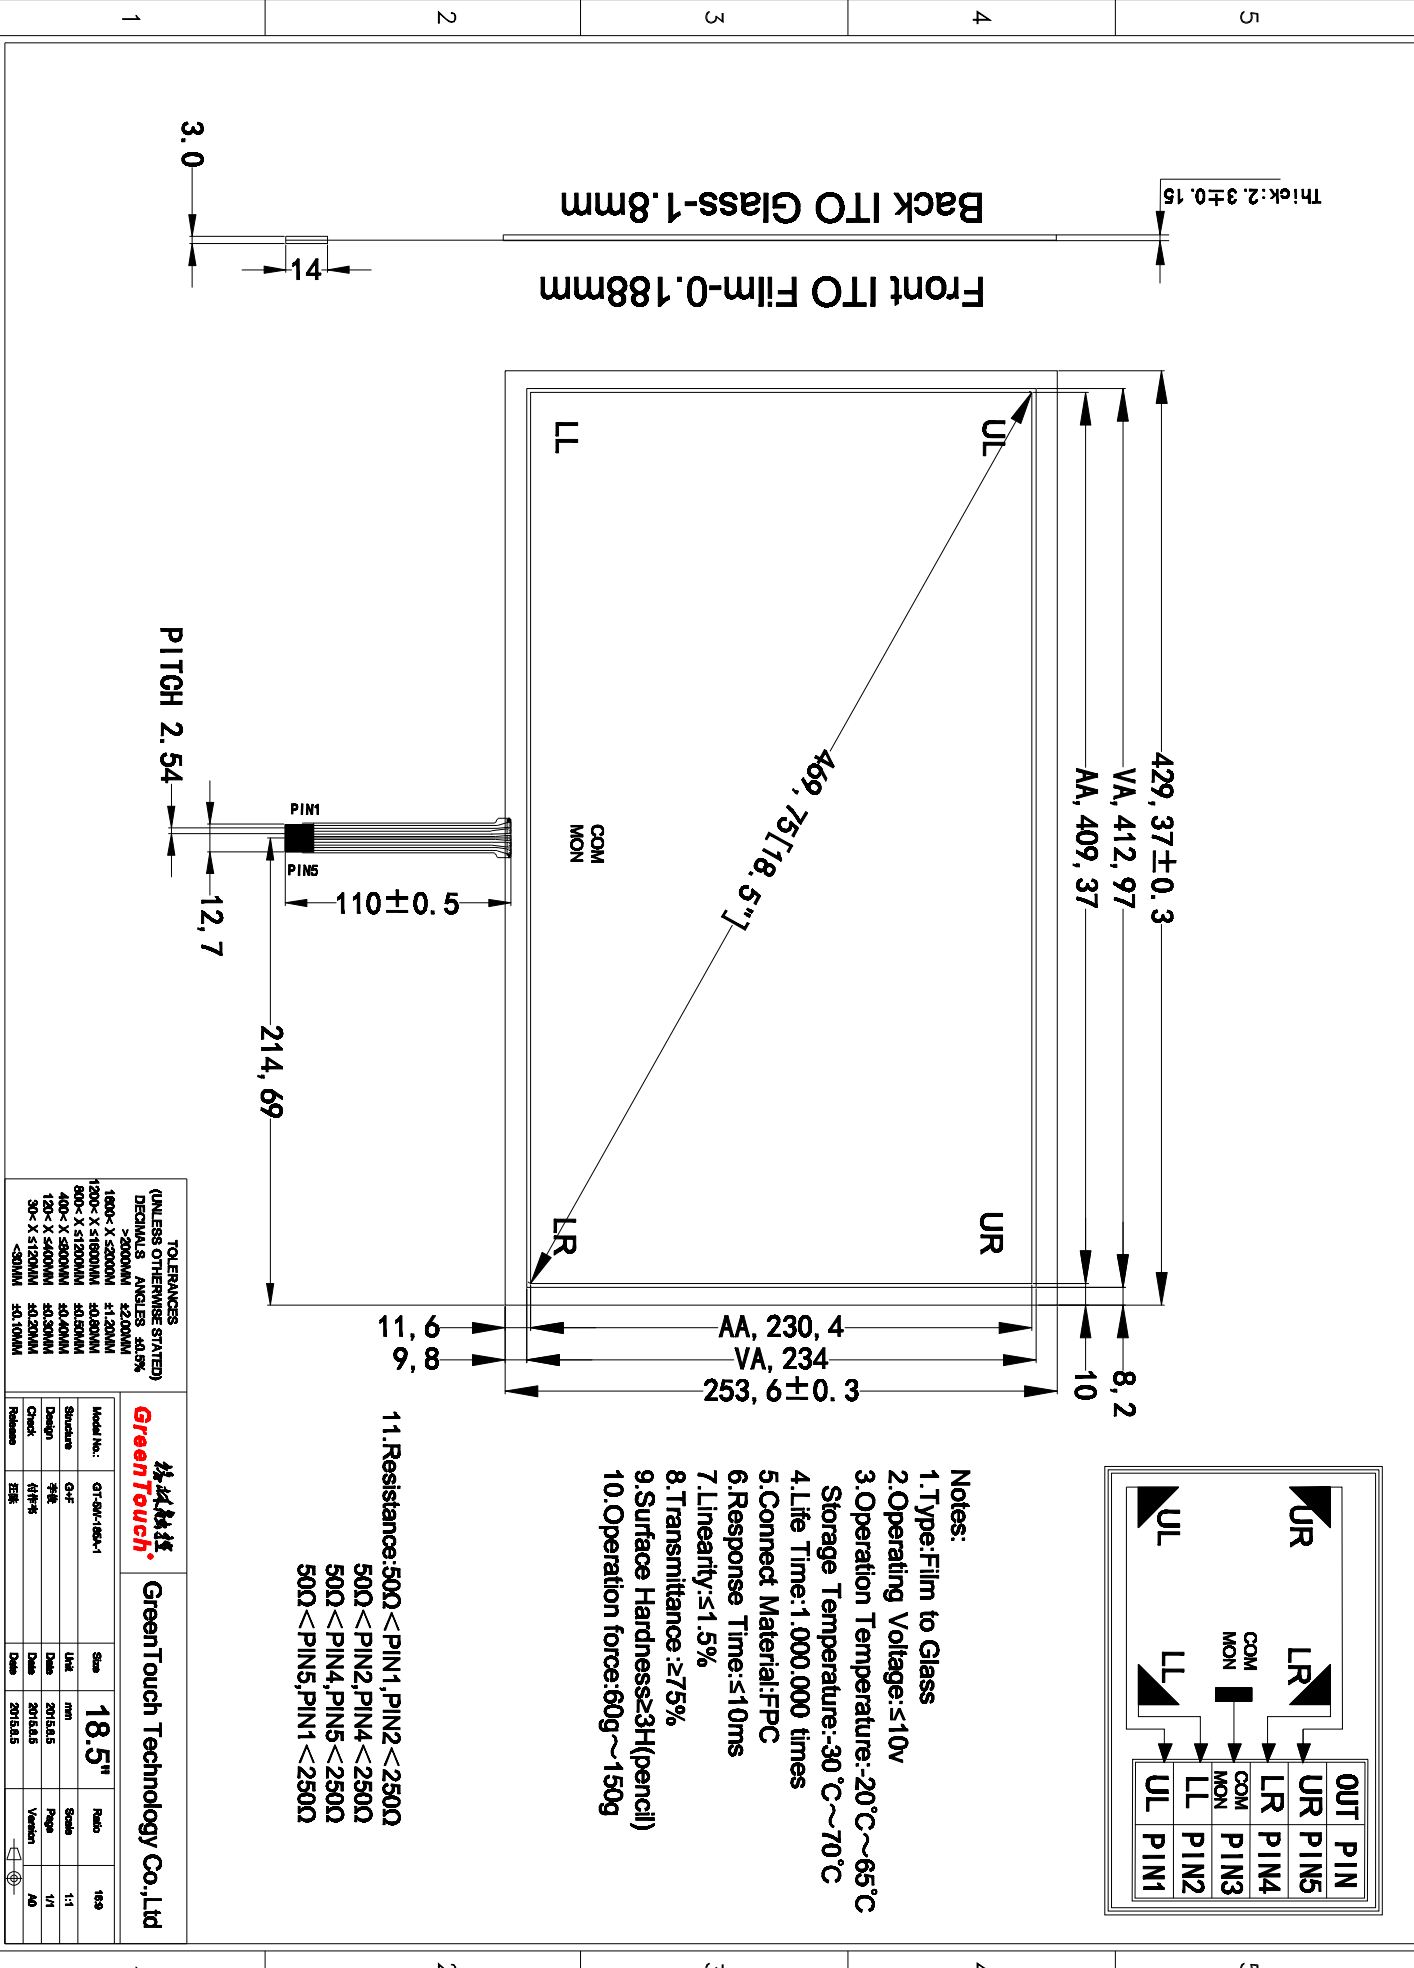

Notes:

- 1.Type:Film to Glass
- 2.Operating Voltage:≤10V
- 3.Operation Temperature:-20°C~65°C
Storage Temperature:-30°C~70°C
- 4.Life Time:1,000,000 times
- 5.Connect Material:FFPC
- 6.Response Time:≤10ms
- 7.Linearity:≤1.5%
- 8.Transmittance:≥75%
- 9.Surface Hardness:≥3H(pencil)
- 10.Operation force:60g~150g

- 11.Resistance:50Ω < PIN1, PIN2 < 250Ω
50Ω < PIN2, PIN4 < 250Ω
50Ω < PIN4, PIN5 < 250Ω
50Ω < PIN5, PIN1 < 250Ω

GreenTouch 绿域触控 GreenTouch Technology Co.,Ltd

Model No.:	GT-QW-18.5-1	Size	18.5"	Ratio	16:9
Structure	5+2F	Unit	mm	Scale	1:1
Design	8/18	Date	2015.5	Page	1/1
Check	6/18-18	Date	2015.5	Version	A0
Reviewed	EE	Date	2015.5		

TOLERANCES
(UNLESS OTHERWISE STATED)

DIAMETERS	ANGLES	±0.5%
>300MM	±2.0MM	
100~> X 500MM	±1.20MM	
750~> X 5700MM	±0.50MM	
800~> X 5700MM	±0.50MM	
400~> X 5400MM	±0.40MM	
120~> X 5400MM	±0.25MM	
30~> X 5120MM	±0.20MM	
<30MM	±0.10MM	

5

4

3

2

1