

## 2153A 21.5" LCD Touch all-in-one PC

GreenTouch's 3A series computer touch all-in-one computer, with low power consumption, ultra-thin body design, high-resolution display and excellent multi-touch interactive experience touch solutions, compared to ordinary monitors, 3A series of professional design and High performance is more suitable for applications in retail and other industries. Designed and built by GreenTouch, this model has a long life cycle and can supply long-term needs.



This model is versatile and powerful, with modular design and optional configuration. For customers with low performance requirements, the ultra-low power consumption and cost-effective INTEL 2177U solution is recommended; for customers with high performance requirements, the optional performance is more powerful. The core series I3/I5/I7-U solution, onboard Intel HD graphics and onboard audio decoding, optional memory size, built-in SSD solid state drive, can be used with a second 2.5-inch hard drive to increase storage capacity; dual-antenna WIFI, Built-in speaker, 12V low voltage power supply.

The All-in-One comes with a range of input/output connections to support a variety of third-party peripherals. Standard ports include 2 RS-232 serial port, 4 USB ports, Gigabit wired network card interface and 1 set of 3.5MM audio input ports and 1 set of audio output ports, 1 VGA and 1 HDMI video output port, which is convenient for adding Second officiant.

The series features industry-leading GreenTouch projected capacitive touch technology. This model has global regulatory agency certification, as well as GreenTouch's warranty and after-sales service. It provides a cost-effective all-in-one touch solution for industrial embedded system integrators and value-added resellers (VARs).

### Features

- Optional Motherboard Configuration includes:  
Intel Bay Trail-d chipset with:  
Celeron 2117U@1.99GHz  
Intel Core-u series chipset with  
Intel Core I3-U  
Intel Core I5-U  
Intel Core I7-U
- Touch technologies include:  
Projected Capacitor:
- Stylish appearance
- Continues to work even if the touchscreen is scratched
- Easy integration, low maintenance
- Excellent performance
- Accuracy and reliability
- Drift free operation
- Worldwide agency approvals
- One year standard warranty

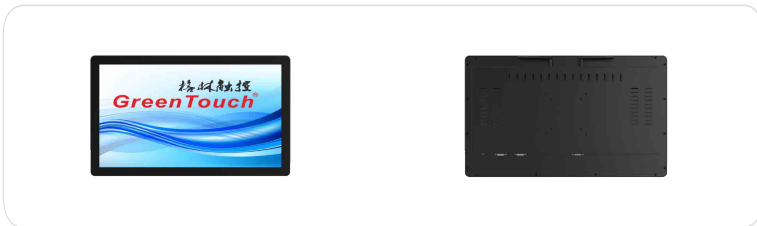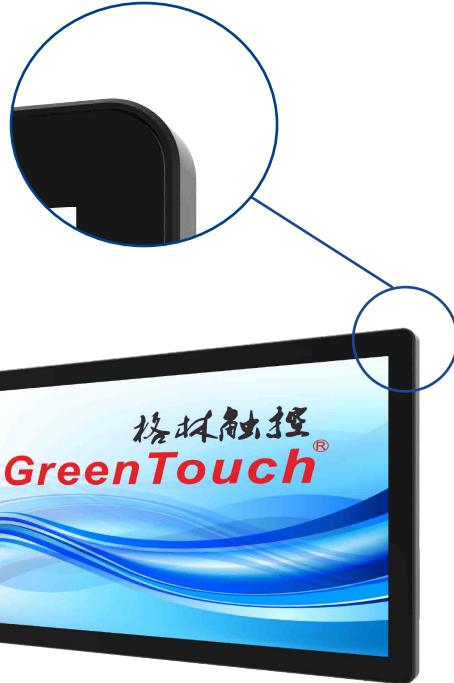

### Ordering Information

Model	Part Number	CPU	RAM	Storage	Surface Treatment	Availability
2153A	GT-TC-2153A-J1900-D2-S64	Intel J1900	2G	64G	Clear	Worldwide
	GT-TC-2153A-I3-D2-S128	Intel Core i3	2G	128G	Clear	Worldwide
	GT-TC-2153A-I5-D8-S256	Intel Core i5	8G	256G	Clear	Worldwide
	GT-TC-2153A-I7-D8-S512	Intel Core i7	8G	512G	Clear	Worldwide

To find out more about our extensive range of GreenTouch touch solutions, go to [www.greentouch.com.cn](http://www.greentouch.com.cn), or [ifo@greentouch.com.cn](mailto:ifo@greentouch.com.cn)

Service call: +86-755-29370883/29371519

Shenzhen GreenTouch Technology Co., Ltd. reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products. GreenTouch (logo) and Shenzhen GreenTouch Technology Co., Ltd. Copyright . All rights reserved.

2016 Shenzhen GreenTouch Technology Co., Ltd. All rights reserved.

- “Design for simple and convenience” the idea
- Outstanding quality, reliability and Cost-effective

### About GreenTouch

Shenzhen GreenTouch Technology Co., Ltd. is a professional manufacturer of product. Our company specializes in R&D, manufacture and marketing of high-grade touch screen and value-added touch machine. Our company has our own brand—GreenTouch and provides customers with touch products including SAW touch screen, IR touch screen, four-wire touch screen, five-wire touch screen, various touch screen monitors and touch all in one PC TV. GreenTouch has automatic production lines and the sealed dust-free workshops and has been certified to ISO9001 Quality Management System . The products are inspected in strict accordance with the quality management system. Quality management becomes an essential part of operation. Our products have been certified to CE, FCC, ROHS . The objective of GreenTouch is to become the most reliable supplier of touch screen, high value-added and special touch products and touch solutions in the world.

### Applications

- retail terminal
- Rail transit
- Finance and other industries
- self service

### Specifications

Case/ frame color	Black / Silver color
Machine dimensions	526mm(W) x 317.3 mm(H), Thickness: 47 mm
Display type	21.5" Diagonal, Ratio 16:9, Active matrix TFT LCD, LED backlight
Resolution(pixel)	1920 x 1080 @ 60Hz
Active Area Dimensions	476.6mm(H) x 268.1mm(V)
Display Colors	16.7M
Brightness (Standard)	250 cd/m <sup>2</sup>
Response time (standard)	5ms
View Angle(from center)	Horizontal (left / right): ±89° or a total of 178° Vertical (up / down): ± 89° or a total of 178°
Contrast ratio (standard)	1000: 1(Typ.)
Touch Technology	projected capacitive Touch chip: welda, eeti, ilitek Touch points: 1-10 Touch supply voltage: 5V Touch interface: USB Touch support system: Windows, Android, linux
Motherboard	Intel Bay Trail-d chipset with: Celeron J1900 Intel Core series with: Intel Core I3-U Intel Core I5-U Intel Core I7-U
Graphics	Onboard Intel HD graphics
Sound Card	Onboard Realtek ALC662HD audio decoding
RAM	Optional 2GB, 4GB, 8GB
SSD	32G, 64G, 128G, 256G
HDD	NA
Wifi	Built-in 802.11b / g / n wireless, external two 30db omnidirectional antenna
Speakers	Built-in 2" 2W speakers
Extra Video output	1" VGA, 1" HDMI
USB interface	4" USB TYPE-A
Network card	1 road onboard Realtek 8111e Gigabit
Audio interface	1" 3.5mm Audio input; 1" 3.5mm Audio output
RS232 interface	2" RS232(standard) interfaces
Power	External DC, input voltage DC: 12V; INPUT POWER CONNECTOR SPECIFICATIONS (for all in one PC) - Type: DC cartridge receptacle; Cartridge ID: 5.5 mm (± 0.3 mm); Needle OD: 2.0 mm (+0.0 -0.1 mm); Cartridge depth: 8.0 mm (± 0.3 mm);
Power consumption(standard)	Depend on Motherboard and the minimum is 25W
Supported OS	Support Windows OS(suggest Windows7 up );Linux:Android x86
Temperature	Operating: 0°C to 60°C; Storage: -20°C to 60°C
Humidity	Operating: 20% to 80% (non-condensing); Storage: 5% to 95% (non-condensing)
Warranty	1 year
Weight (approx.)	Net weight: 4.3 kg(Typ.); Shipping: 5.8 kg (reference)
Mounting options	100mm or 75mm VESA mounting
Water and dust protection/Explosion-proof	IP65(front)/IK06(front)
Surface treatment	AG AR AF (Optional)
Agency Approvals	FCC, CE, CB, China RoHS COC